

CASE STUDY

AMERICAN NITRILE

aquatherm fits like a glove

 aquatherm®



Part of the Solution
www.aquatherm.de

PROJECT:

American Nitrile Manufacturing Plant

LOCATION:

Grove City, Ohio, USA

COMPLETION:

2022

APPLICATION:

Refrigeration systems

PRODUCT:

aquatherm blue

THE CHALLENGE:

A 527,000 sq.ft. warehouse was on a fast-track conversion to a manufacturing plant, and needed an extensive piping system to handle its vital process cooling needs

THE SOLUTION:

aquatherm PP-RCT pipe fit the bill, as it allowed fast fabrication and installation and easy overhead mounting throughout the massive space





American Nitrile's
manufacturing facility
in Grove City, Ohio.

PROCESS COOLING IN NITRILE GLOVE FACTORY WITH AQUATHERM PIPES UP TO 630 MM DIAMETER

When we say that aquatherm pipe can handle commercial heating and cooling and industrial process cooling projects of any size, we're not just talking. For proof, look no further than the American Nitrile plant in Grove City, OH, a suburb of Columbus. aquatherm pipe in sizes up to 24-in. is playing an integral role in the conversion of a 527,000 sq. ft. warehouse into a factory that will produce medical and non-medical latex-free gloves. A LOT of gloves: 3.6 billion annually when the plant is fully operational.

15,000 ft. of aquatherm blue SDR 17.6 will serve the facility's chilled-water process loop.

The 24-in. pipe is the largest SDR (standard dimension ratio) pipe that Aquatherm manufactures.

American Nitrile engineer Alex Mallison said the process cooling needs

of this plant are extensive: about 750,000 gallons of water each day. That's because the proper cooling of the material makes the difference between a high-quality nitrile-based liquid and a "ball of goo."

"Very simplistically, in this process we're taking a solid that's suspended in water, getting it to stick to a ceramic mold in the shape of a hand, and then heating it to remove all the water and other aqueous chemicals," Mallison explained. "The cooling is necessary as the mold passes through three nitrile dipping tanks. If we didn't have that cooling, our nitrile would take on a gel-like consistency instead of being a nice, smooth, almost water-like substance."

Mallison noted that for every 10 gallons of water brought into the facility, he can recycle four gallons directly back into the process. The other six gallons are treated in an internal

state-of-the art wastewater facility before being discharged to the city.

The aquatherm pipe carrying all that cooling water includes 24-in. pipe for the mains, 12-in and 14-in. for the supplies and returns, and 4-in. and down for the connections to the machines. The supply water in the open-loop system will be cooled to 55°F and will run at 60 psi. The return water will be at approximately 70°F and pressurized to about 40 psi. The condensing water will be 85°F to 110°F depending on the time of year, and the cooling towers will run all year at 40 psi.

Other key components of the process cooling system at American Nitrile include three Daikin chillers with a combined 2,250 tons of capacity, Marley cooling towers, and Grundfos pumps.



Over 4.5 kilometers of aquatherm blue supply the plant's cold water process loop.

COUNTING UP AQUATHERM'S BENEFITS

Lightweight, versatile aquatherm pipe will carry the process cooling water to and from the manufacturing plant's three chillers.

Mallison had spec'd aquatherm pipe on other successful projects and said there were several important factors for its selection at American Nitrile.

"We put a lot of thought into which

pipng system made the most sense for a project this large and complex," he said. "I personally hate doing chilled water/cooling tower systems in carbon steel because of the amount of debris that can build up in the system and how quickly those pipes can corrode."

American Nitrile's founder and CEO, Jacob Block, was eager to get the factory up and running, and the project ran on a tight schedule. aquatherm was a natural choice here. The heat fusion process used to join aquatherm pipe requires no welding,

open flame, or fire watch, is much faster than welding steel, and creates virtually leak-free connections.

"You basically set up the fusion machine and you can weld four pieces of 24-in. piping in a single day," Mallison said. "A good stick welder might be able to complete one weld in that time. So the time savings [of the installation] were significant."

The light weight and ease of working with the aquatherm pipe also impressed the union pipefitters on the job—20 of whom Mallison had trai-





aquatherm blue transports the process cooling water to and from the plant's three chillers.

ned specifically for this project. They particularly appreciated that, depending on the size and SDR of the pipe, aquatherm is up to 70 percent lighter than carbon steel pipe.


"The craziest thing is watching a guy lift a 24-in. tee above his head," Mallison said. "You just can't do that with metal, which is heavy, bulky, and hard to work with. These guys are working their tails off for us here, so if there's something we can do to make their jobs easier and safer, we're going to do it."

In addition, unlike metal pipe, aquatherm is hydrophobic and will never scale or corrode, so the flow rate when the pipe is new will remain the flow rate throughout its long service life.

The clincher for specifying aquatherm came when Mallison contacted his long-time aquatherm distributor in central Ohio, Pipe Valves, Inc., a leading independent industrial PVF supplier in the Midwest. The distributor

assured him that it could easily supply everything the American Nitrile project needed.

"We created a parts list for Pipe Valves, and they had almost everything we needed already in their possession," Mallison said. "What they didn't have they were able to obtain and ship directly to the facility within a week or two, and we were off to the races."

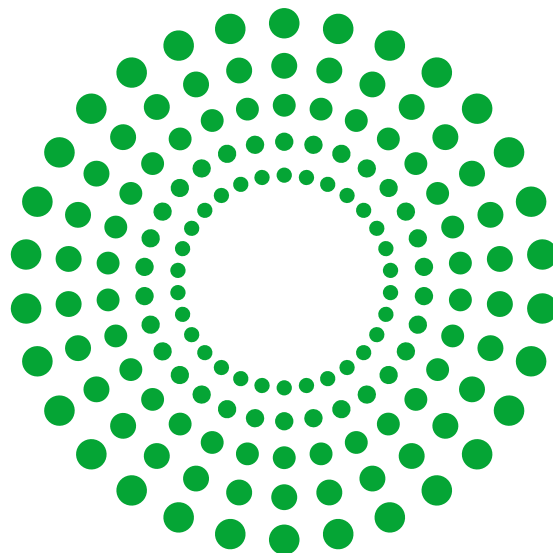

aquatherm GmbH | Biggen 5
57439 Attendorn | Deutschland

Tel: +49 2722 950 0
Mail: info@aquatherm.de



[aquatherm - Das Familienunternehmen](#)



[aquatherm.familienalbum](#)



[aquatherm GmbH](#)



[aquatherm](#)



[aquatherm GmbH](#)